

"L" Series by



The Prudent Choice

*Remarkable performance
with only 1.2 gallons of
water per rack!*

*90 Second Cycle
Air Gap Fill!*

The "L" Series

**DECREASES your Chemical Usage
SAVES on Sewer Surcharges
REDUCES Heating Costs
LOWERS Water Bills**



L-3DWC-S

*Corner inside sump
with built-in scrap
accumulator*



L-3DW-S

*Pass-thru inside
sump with built-in
scrap accumulator*

*A true
LOW-ENERGY
dump and fill
dishmachine!*

**All "L" Series, Low-Water Machines are Convertible
(corner to pass-thru or pass-thru to corner).**

Also available in a 3-door Up Version.

At American Dish Service, Quality People, Designs,
and Products have been the foundations of our
organization for over **45 years**.

www.americandish.com

American Dish Service
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free (800) 922-2178** **Phone (913) 422-3700** **Fax (913) 422-6630**

“L” Series

LOW WATER USE - HIGH SPEED OPERATION

Two-stage filter protects pump and spray jets
Stainless steel sump and impeller
1.2 gallons of water per rack

- Top Mount Controls
- Exterior Mounted Chemical Pump Heads
- Quick-disconnect, Easy Service Access, Electrical Controls
- Eye-Level Temperature Gauge
- Built-in De-liming Switch
- Large Capacity Internal Scraper (Inside Sump Only)
- No-Adjustment Solenoid Replacement

- 1 1/2 H.P. Wash & Rinse Pump
- Prime Switches
- Automatic Chemical Feed
- Nylatron® Strips to Protect Stainless Doors




Also available in a 3-door Up Version.

CAUTION:

Electrical and plumbing connections should be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety Codes. American Dish Service cannot be held liable for improper or faulty installation of this equipment.

* American Dish Service reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency without prior notification.

TYPICAL TABLE DETAILS

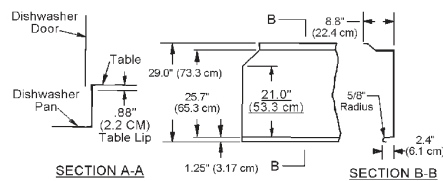

L-3DW-S

**L-90-3DW-S
L-90-3DWC-S**


NSF RATED CAPACITY (RACKS/HOUR)	37
WASH TIME (IN SECONDS)	50
RINSE TIME (IN SECONDS)	30
DWELL (IN SECONDS)	10
GALLONS PER HOUR	44
TOTAL CYCLE TIME (IN SECONDS)	90

WATER TEMPERATURE OF SUPPLY WATER (NSF)	120° F. MINIMUM
	or 49° Celsius
WATER CONSUMPTION (NSF RATED)	1.2 GALS. PER CYCLE
	or 4.5 liters/cycle

MOTOR RATING	(1.125 KW) 1.5 HORSEPOWER
ELECTRICAL RATING (NEC)	115 Vac, 20amp breaker, 50/60Hz, 1 phase

Connect to Supply Source using 10-12 AWG Copper wires using non-time delay fuse of 20 amp rating or 20 amp circuit breaker.

RACK SIZE	STANDARD 19.75" X 19.75" or 50.2 x 50.2 cm
DOOR CLEARANCE	20.375" TALL x 20.6" WIDE or 51.75 x 52.07 cm
WATER INLET	(1/2") F.P.T.
DRAIN SIZE (Scrap Trap)	(2")
HEIGHT (ADJUSTER FEET WILL GIVE)	MIN: 70.5", MAX: 71.48" or 179.1 to 181.66 cm
WIDTH (OVERALL)	29" or 73.6 cm
WIDTH, TABLE TO TABLE (INLINE MODEL)	25" or 63.5 cm
DEPTH (OVERALL)	28" or 71.1 cm
SHIPPING WEIGHT	300 Lbs. 136.1 kg
SHIPPING DIMENSIONS	36" L x 36" W x 78" H 91.4 cm x 91.4 cm x 198.1 cm

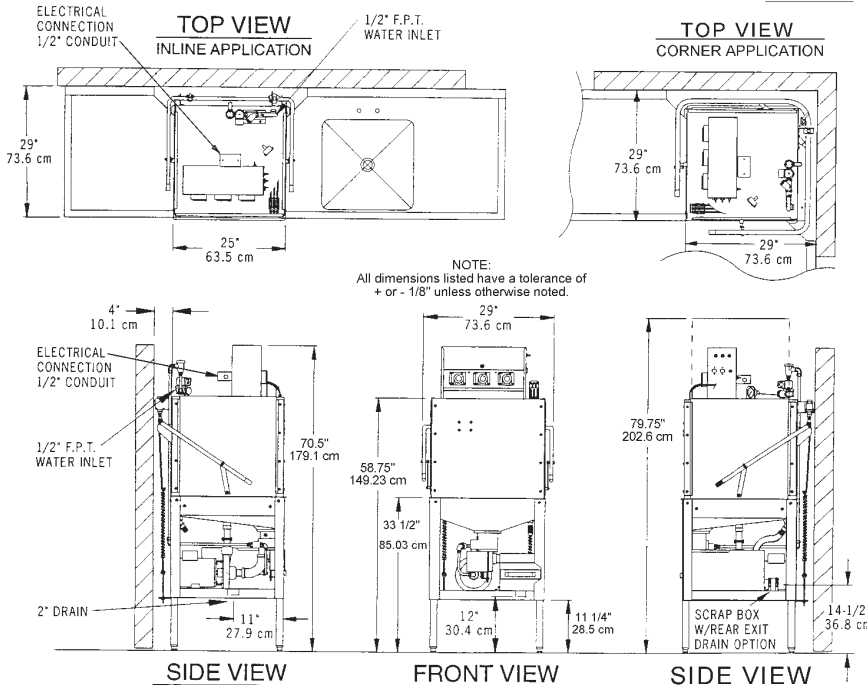

Effective: 03/2008

© 03/2008

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.

Toll Free Phone Fax
 900 Blake Street Edwardsville, KS 66111-3820 (800) 922-2178 (913) 422-3700 (913) 422-6630