

*Finally, the most Reliable
Undercounter is
available with
Pumped Drain &
Tank Heat.*

ET Series



Pumped Drain
Allows installation
in almost all
applications.

Screens
Dual screening protects
both wash & drain
pumps from debris.

Optional Heat
Maintains tank
temperature
rack after rack.



Ergonomical Design

Allows operators to
load & unload with ease.
Short door construction
(10") keeps the aisle
free and clear.

Perfect for Restaurants, Bars, and Fast Food Operations.

At American Dish Service, Quality People, Designs,
and Products have been the foundations of our
organization for over **45 years**.

www.americandish.com

American Dish Service
Manufacturers of Ware Washing Equipment


900 Blake Street Edwardsville, KS 66111-3820 Toll Free (800) 922-2178 Phone (913) 422-3700 Fax (913) 422-6630

ET Series

MULTI-USE UNDERCOUNTER DISHWASHERS


ET... The Dishmachine of choice, when space is a concern. You will **NEVER AGAIN** have to sacrifice production or results.

- 1 1/2 HP Wash & Rinse Pump
- Reliable Tank Heat (Sustained)
- Automatic Chemical Dispensing
- Pump Drains Water (up to 20")
- Available 3" Taller Version
- 90 Second Complete Time Cycle
- Optional Chemical Alarms
- Dual Screening Catches Debris

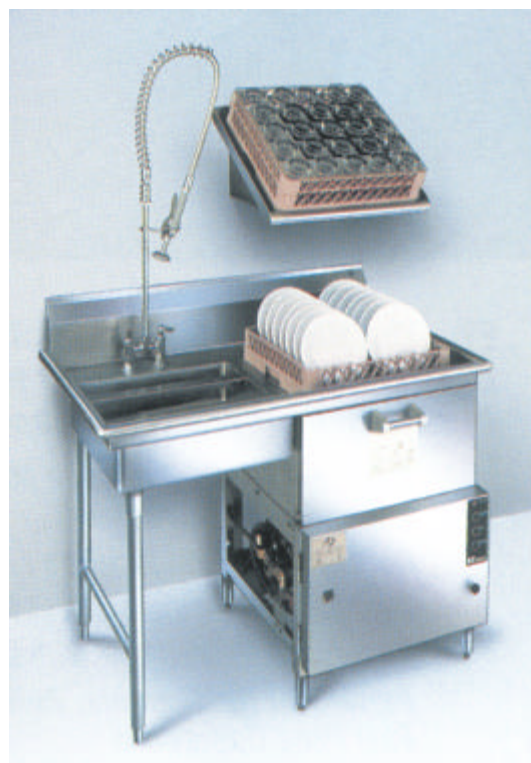


Operate a free standing complete warewashing center in only 48" of space. To do this, combine our ET-AF Undercounter with our stainless steel table package.

ADS
American Dish Service
Manufacturers of Ware Washing Equipment

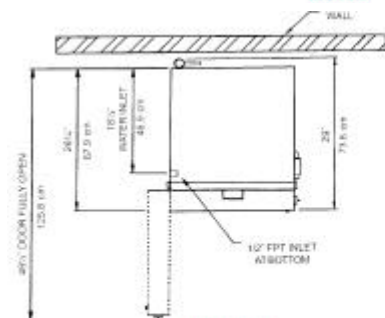

TOP VIEW



FRONT VIEW


CAUTION:

Electrical and plumbing connections should be made by a qualified Service Person who will comply with all available federal, state and local Health, Electrical, Plumbing, and Safety codes.

* Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

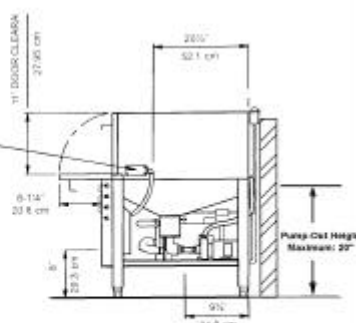

SIDE VIEW

ET Series with Pumped Drain and Heat

ET-AF

FAMILY MODELS

	ET-AF	ET-A	ET-AH
NSF RATED CAPACITY (RACKS/HOUR)	30	24	20
WASH TIME (IN SECONDS)	45	60	75
RINSE TIME (IN SECONDS)	30	45	60
DWELL (IN SECONDS)	15	15	15
TOTAL CYCLE TIME (IN SECONDS)	90	120	150

WATER TEMPERATURE OF SUPPLY WATER (NSF) **120° F. MINIMUM**
(49° CELSIUS)

WATER CONSUMPTION (NSF RATED) **1.7 GALS. PER CYCLE**
Or 6.4 liters/cycle

MOTOR RATING (Pump) **(1.125 KW) 1.5 HORSEPOWER**

DRAIN MOTOR RATING **(.037KW) 1/20 HP**

SUSTAINER HEATER **1/2KW**

ELECTRICAL RATING (NEC) **115 Vac, 20amp breaker, 50/60Hz, 1 phase**

Connect to Supply Source using 10-12 AWG
Copper wires using non-time delay fuse of 20
amp rating or 20 amp circuit breaker.

RACK SIZE . . . **STANDARD 19.75" X 19.75" (Or 50.2 X 50.2 cm)**

DOOR CLEARANCE* . **11" TALL X 22.25" WIDE (Or 27.9 x 56.5 cm)**

WATER INLET **(1/2") F.P.T.**

DRAIN SIZE **3/4" I.D. Hose by 60" Long**

PUMP-OUT HEIGHT (Maximum) **20"**

HEIGHT OF STANDARD ET (ADJUST FEET WILL GIVE) **MIN: 33.5" - MAX: 34.5"**
(85.1 to 87.6 cm)

HEIGHT OF ET-AF-3 **MIN: 36.5" - MAX: 37.5"** (92.7 to 95.2 cm)

WIDTH (OVERALL) **25.5"** (64.8 cm)

DEPTH (OVERALL) **29"** (73.6 cm)

SHIPPING WEIGHT **201 POUNDS** (91.2 kg)

SHIPPING VOLUME (CRATED) **28.6 CU. FT.** (.8 cu meters)

ADS has built a strong history based on Customer Service, Quality and Reliability.
A Commitment to Excellence is the driving force behind American Dish Service.