

AFB Bakery Dishwasher by

The Economical Answer to Tall Warewashing Needs



Sheet Pans require a Special Stainless Steel Dishrack for Proper Washing.



AFB Bakery Dishwasher

LOW ENERGY
TIME-SAVER
RELIABLE

- Available in either 90, 120, or 150 second time cycle
- Holds Standard 20"x20" Racks
- High Pressure, High Volume 1.5 HP Pump
- Built-in chemical dispensing

The AFB is ideal for tall wares like sheet pans while still providing great results for glassware, flatware, and place settings. Its quality construction and reliability make it a time-saving solution for your complete warewashing needs.

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over 45 years.

www.americandish.com



American Dish Service
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 Toll Free (800) 922-2178 Phone (913) 422-3700 Fax (913) 422-6630

AFB Bakery


LOW WATER USE - HIGH SPEED OPERATION

150 second time cycle available that provides a Pre-rinse /Wash/Rinse


- **Quality & Reliability**
- **Effective Washing & Sanitizing of Bakery Trays and Pots & Pans**
- **Every Rack Washed in Clean Water with a Complete Fresh Water Purge with every Cycle**
- **27 1/2" Door Opening with Safety Interlock**



A complete warewashing center in only 110" of floor space. The soil dishtable incorporates three 17" x 21" x 14" deep sinks.
(also available with 20" x 20" x 14" deep sinks in 120" OA length)

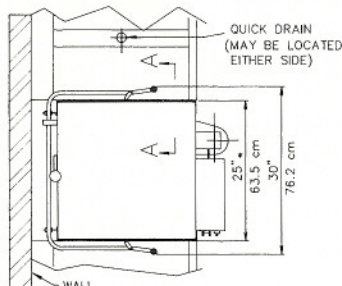


TOP VIEW

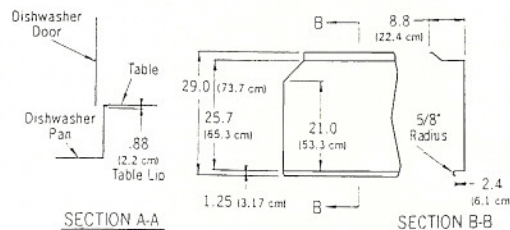


SECTION A-A

SECTION B-B

**TOP VIEW
RECOMMENDED TABLE DETAILS**

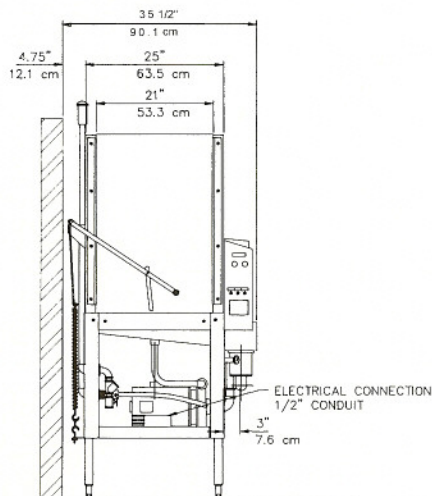

SIDE VIEW

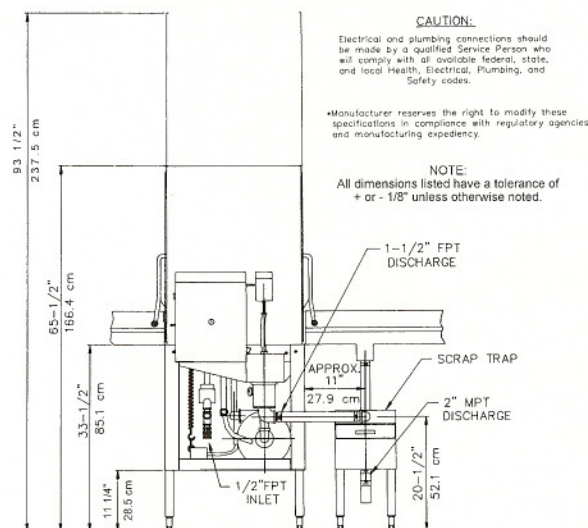

FRONT VIEW

ADs
American Dish Service
 Manufacturers of Ware Washing Equipment
www.americandish.com

MODEL AFB SPECIFICATIONS

	FAMILY MODELS		
	AF-B	A-B	AH-B
RATED CAPACITY (Racks/Hr.)	37	28	23
WASH TIME (Sec.)	45	60	75
RINSE TIME (Sec.)	30	45	60
DWELL (Sec.)	15	15	15
TOTAL CYCLE TIME (Sec.)	90	120	150
WATER TEMPERATURE	130 F Min. 54.4 C Min.		
WATER CONSUMPTION	2.5 Gal's Per Cycle 8.33 Liters Per Cycle		
MOTOR	1.125 KW 115 Volts Single Phase		
ELECTRICAL RATINGS	Connect to Supply Source using 10-12 AWG copper wires. Circuit Protection: 20 AMP Circuit Breaker or Fuse with a 20 AMP Rating.		
RACK SIZE	19 3/4" x 19 3/4" 50.2 cm x 50.2 cm		
DOOR CLEARANCE	27 1/2" x 21" 69.8 cm x 53 cm		
WATER INLET	1/2" F.P.T.		
DRAIN	1 1/2" F.P.T.		
HEIGHT (Door Open)	93 1/2"		
HEIGHT (Door Closed)	237.5 cm 65 1/2"		
WIDTH (Overall)	76.2 cm 30"		
WIDTH (Table to Table)	63.5 cm 25"		
DEPTH (Overall)	34 1/2" 87.6 cm		
SHIPPING WEIGHT	301 lb. 136.5 kg.		
SHIPPING VOLUME	55.4 cu. ft.		

Effective: 10/02

CAUTION: Certain materials such as aluminum could be damaged when exposed to excessive concentrations of sodium hypochlorite (liquid bleach). Have your chemical supplier check for proper levels of chlorides to prevent damage.

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free (800) 922-2178 Phone (913) 422-3700 Fax (913) 422-6630**