

# *The **Most** Reliable Undercounter With Pumped Drain & Tank Heat.*

## ***ET Series***



**Pumped Drain**  
Allows installation  
in almost all  
applications.



**Screens**  
Dual screening protects  
both wash & drain  
pumps from debris.

**Sustained Heat**  
Maintains tank  
temperature  
rack after rack.



### ***Little PowerHouse***

Only 34 1/2" Tall with a  
14" Door Opening, while  
Washing and Rinsing with 1 1/2  
HP.



***Perfect for Restaurants, Bars, and Fast Food Operations.***

At American Dish Service, Quality People, Designs,  
and Products have been the foundations of our  
organization for over **45 years**.

***[www.americandish.com](http://www.americandish.com)***



**American Dish Service**  
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820    Toll Free (800) 922-2178    Phone (913) 422-3700    Fax (913) 422-6630

# ET Series


## MULTI-USE UNDERCOUNTER DISHWASHERS

ET... The Dishmachine of choice, when space is a concern. You will **NEVER AGAIN** have to sacrifice production or results.


- 1 1/2 HP Wash & Rinse Pump
- 90 Second, 2 Minute, and 2 1/2 Minute Time Cycles
- Reliable Tank Heat (Sustained)
- 14" Door Opening
- Automatic Chemical Dispensing
- Optional Chemical Alarms
- Pump Drains Water (up to 20")
- Dual Screening Catches Debris



**Operating a free standing complete warewashing center in only 48" of space. Just combine our ET-AF Undercounter with our stainless steel table package.**

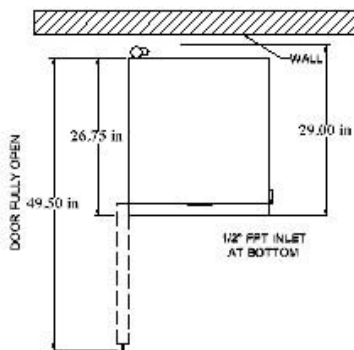

TOP VIEW

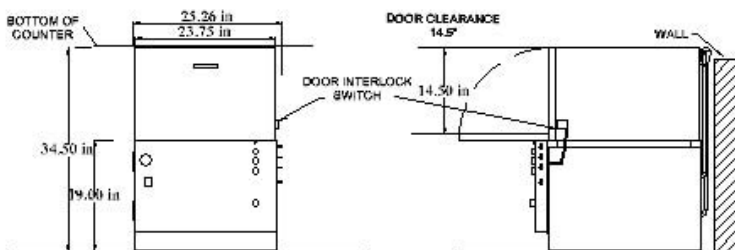

FRONT VIEW

SIDE VIEW

Effective: 7/2012

[WWW.AMERICANDISH.COM](http://WWW.AMERICANDISH.COM)



### CAUTION:

Electrical and plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety codes.

\*Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

### NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

## Skirted ET Pumped Drain and Heat

### ET-AF

### FAMILY MODELS

	ET-AF	ET-A	ET-AH
NSF RATED CAPACITY	30	24	20
WASH TIME(Sec.)	45	60	75
RINSE TIME(Sec.)	30	45	60
DWELL (Sec.)	15	15	15
TOTAL CYCLE TIME (Sec.)	90	120	150
WATER TEMPERATURE-SUPPLY WATER	(NSF) 120 F MIN. 49 C MIN.		
WATER CONSUMPTION (NSF RATED)	1.7 Gal's Per Cycle 6.4 Lit's Per Cycle		
MOTOR RATING (PUMP)	1.5 HP 1.125 KW		
DRAIN MOTOR RATING	1/20 HP .037 KW		
SUSTAINER HEATER	1/2 KW		
ELECTRICAL RATINGS (NEC)	15 VAC, 20 Amp BRKR 50/60 Hz, 1 Phase		
Connect to Supply Source using 10-12 AWG Copper Wires using Non-Time Delay Fuse of 20 Amp rating or 20 Amp Circuit Breaker.			
RACK SIZE	19.75" x 19.75" 50.2 cm x 50.2 cm		
DOOR CLEARANCE	14.5" x 22.25" 27.9 cm x 56.5 cm		
WATER INLET	1/2" FPT		
DRAIN SIZE	3/4" I.D. Hose by 60" Lg.		
PUMP-OUT HEIGHT (Maximum)	20"		
MACHINE HEIGHT	Min 33.5"- Max 34.5" 85.1 to 87.6 cm		
WIDTH (Overall)	25.5" 64.8 cm		
DEPTH (Overall)	29.0" 73.6 cm		
SHIPPING WEIGHT	201 lb. 91.2 kg		
SHIPPING VOLUME (Crated)	28.6 cu. ft. .8 cu. m.		

Copyright: 7/2012

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.