



ADS WIRE CHART (LADDER) for 3-phase, 208-240v power (230v control, non-neutral)
MODEL: HT-25/34

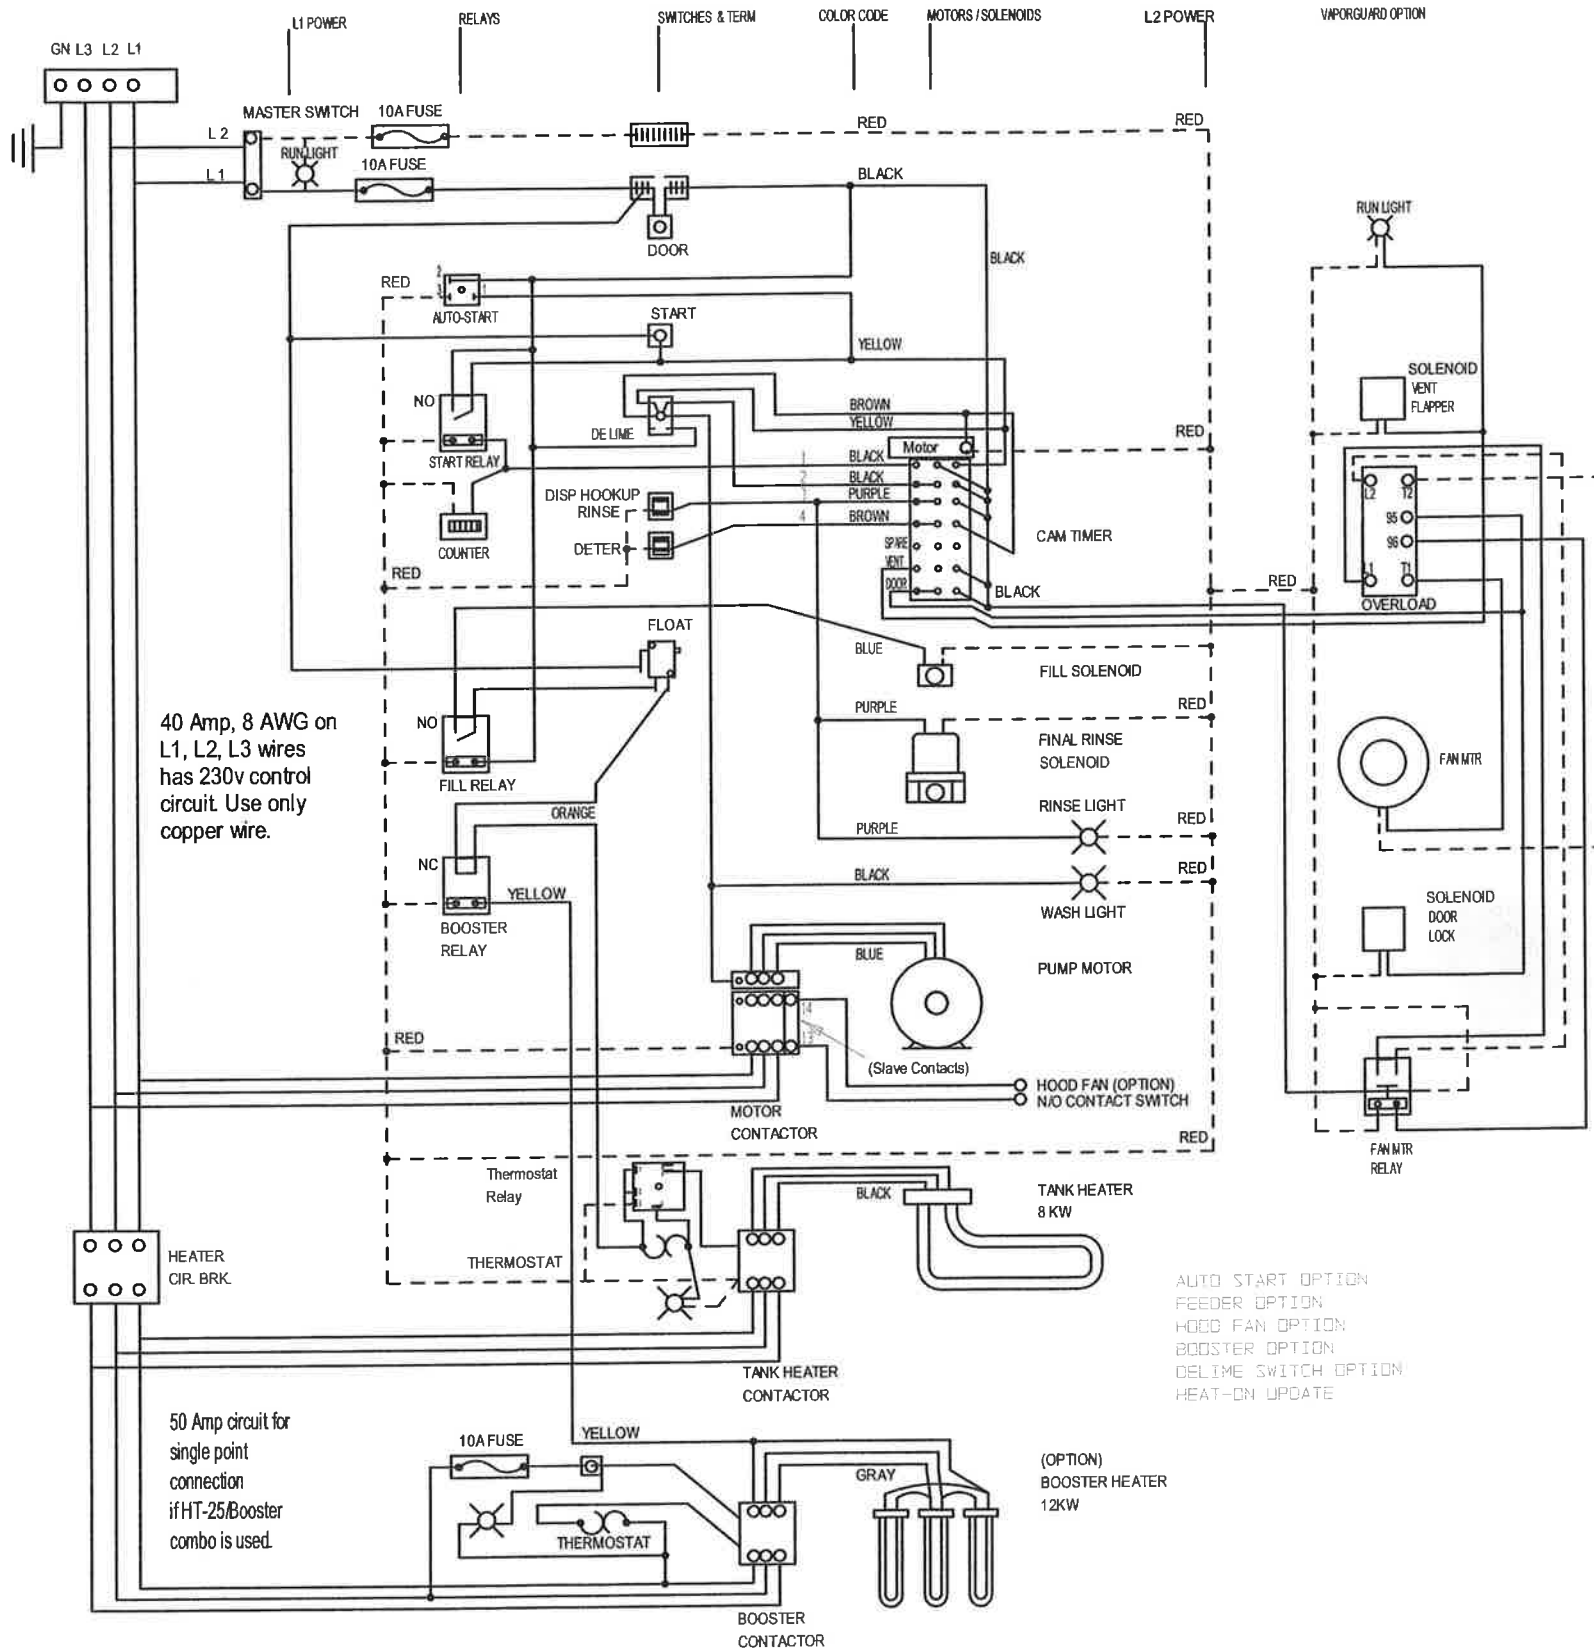

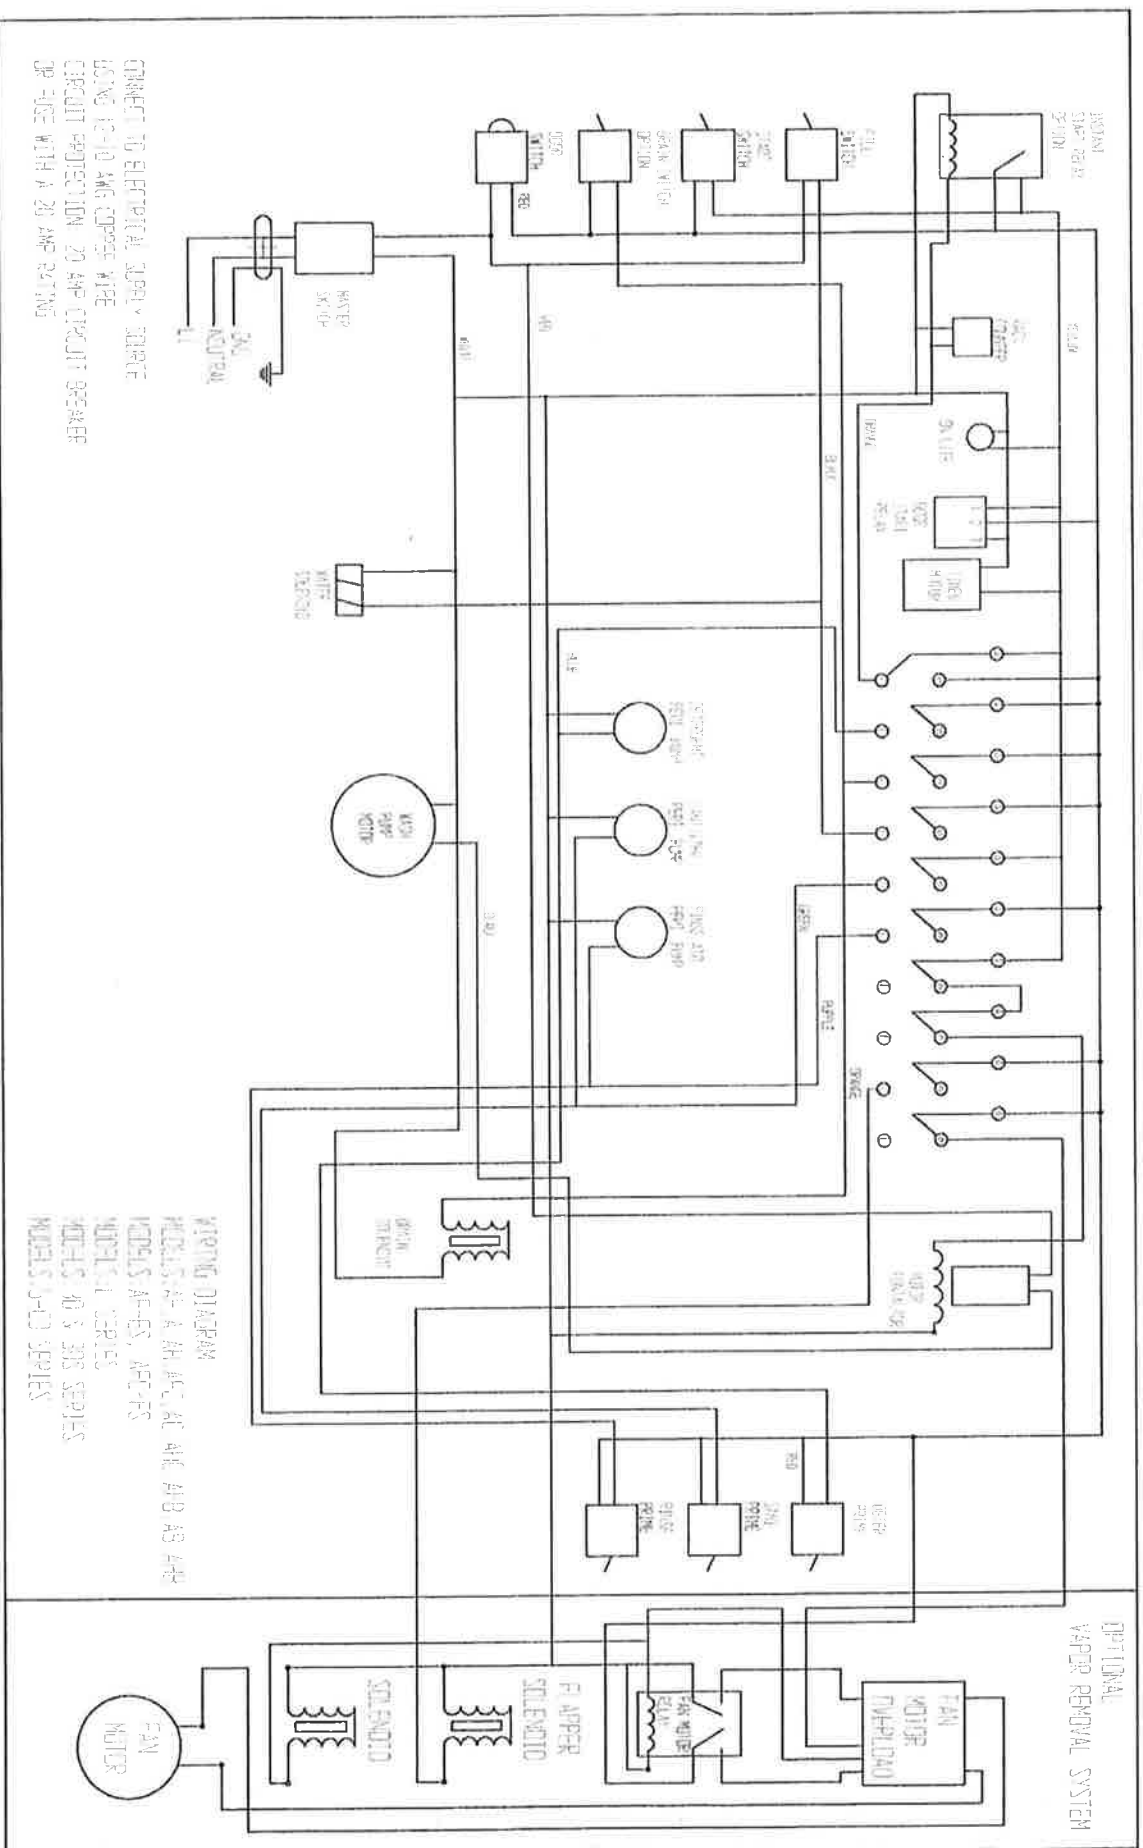

CONNECT TO ELECTRICAL SUPPLY DIRECTLY
 USING 12-10 AWG COPPER WIRE
 CIRCUIT PROTECTION 20 AMP CIRCUIT BREAKER
 OR FUSE WITH A 20 AMP RATING

WIRING DIAGRAM
 MODELS AF-40, AF-40, AF-40, AF-40, AF-40
 MODELS AF-40, AF-40, AF-40, AF-40, AF-40
 MODELS AF-40, AF-40, AF-40, AF-40, AF-40
 MODELS AF-40, AF-40, AF-40, AF-40, AF-40
 MODELS AF-40, AF-40, AF-40, AF-40, AF-40

OPTIONAL
 VAPOR REMOVAL SYSTEM