

Cam Adjustments and Delivery Rates


Model: AF-ES (water consumption set at 0.96 gallons/cycle)

Speed: 90-Second Timer


Squeeze tube size: 1/8" ID (proposed #87-6702)

Peristaltic Pump Motor Speed: 25 rpm


Sanitizer Strength: 6% chlorine

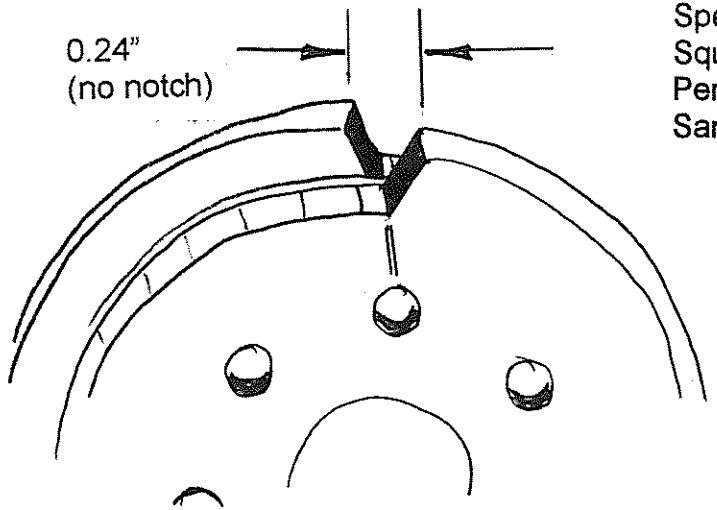

.90 ml liquid feed
9/10ths rotor rotation
10 ppm in .96 gallons

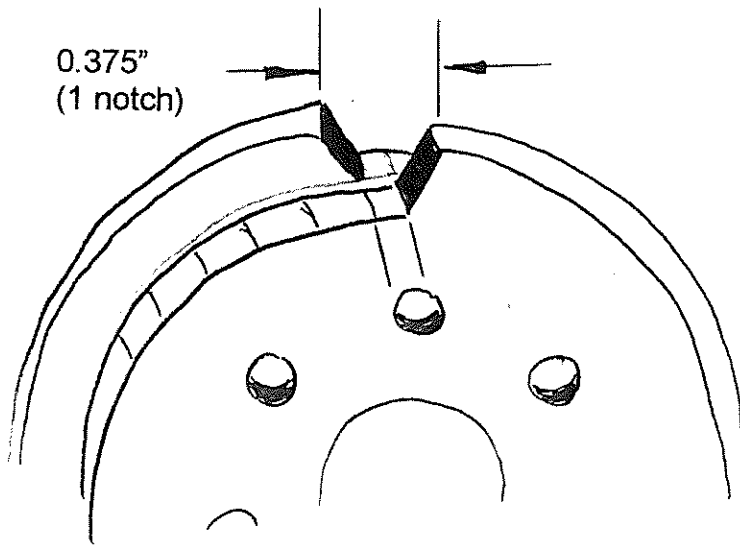

1.75 ml liquid feed
1.75 rotor rotations
50 ppm in .96 gallons

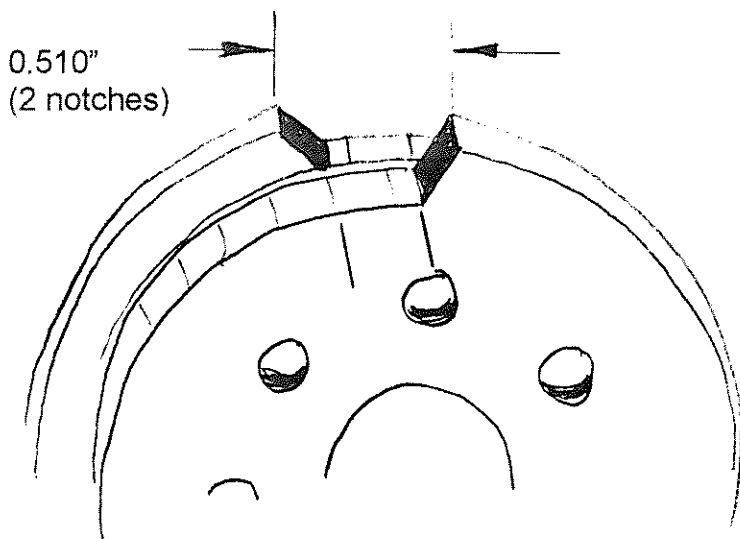

2.90 ml liquid feed
3.1 rotor rotations
75-100 ppm in .96 gallons

Note: notch count can only be done using a single wheel starting at the base of one incline and using the incline base of the opposing cam as the end mark. Count the notches on just one cam.